




## Description

For the electronic measurement of currents: DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit and the secondary circuit.

## Features

- ◆ Open loop transducer using the Hall effect
- ◆ Low voltage application
- ◆ Unipolar +5VDC power supply
- ◆ Primary current measuring range up to  $\pm 200\_ \pm 1200A$
- ◆ Operating temperature range:  $-40^{\circ}C < T_A < +125^{\circ}C$
- ◆ Output voltage: fully ratio-metric(gain and offset)

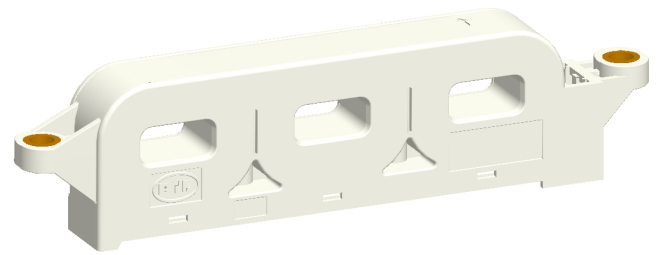

**$I_{PN} = 200\_1200A$**

## Advantages

- ◆ High accuracy
- ◆ Excellent linearity
- ◆ Low temperature drift
- ◆ Hermetic package

## Industrial Applications

- ◆ Standard battery monitoring
- ◆ Hybrid and EV battery pack current sensing
- ◆ Fuel cell current control
- ◆ DC/DC converters and AC/DC inverters
- ◆ Hybrid and EV motor inverter drive
- ◆ EPS and X-by-wire applications
- ◆ Electric compressors for air conditioning

TYPES OF PRODUCTS		
Type	Primary nominal current $I_{PN}$ (A)	Primary current measuring range $I_P$ (A)
BCX7-200IOV1HT	200	$\pm 200$
BCX7-400IOV1HT	400	$\pm 400$
BCX7-500IOV1HT	500	$\pm 500$
BCX7-600IOV1HT	600	$\pm 600$
BCX7-800IOV1HT	800	$\pm 800$
BCX7-900IOV1HT	900	$\pm 900$
BCX7-1200IOV1HT	1200	$\pm 1200$



Parameters Table


PARAMETERS	SYMBOL	UNIT	VALUE			CONDITIONS
			Min.	Typ.	Max.	
<b>Electrical data</b>						
Supply voltage	V <sub>CC</sub>	V	4.75	5	5.25	
Current consumption	I <sub>CC</sub>	mA	30	36	48	@T <sub>A</sub> = 25°C 3 output
Output Load Resistance	R <sub>L</sub>	kΩ	4.7	-	-	@V <sub>OUT</sub> to GND
Output Load Capacitance	C <sub>L</sub>	nF	-	1	-	@V <sub>OUT</sub> to GND
<b>Performance data</b>						
Output voltage	V <sub>OUT</sub>	V	$V_{OUT} = V_{CC} / 5 \times (2.5 + 2 / I_{pn} \times I_P)$			@T <sub>A</sub> = 25°C
Output Linearity	ε <sub>L</sub>	%	-1%	-	1%	@T <sub>A</sub> = 25°C
Accuracy	X	%	-1%	-	1%	@T <sub>A</sub> = 25°C
Quiescent Output Voltage <sup>(1)</sup>	V <sub>OUTQ</sub>	V	2.5±10mV			@T <sub>A</sub> = 25°C B=0
Quiescent Output Voltage Temperature Coefficient	TC <sub>OUTQ</sub>	mV/°C	-0.15	-	0.15	
Sensitivity Temperature Coefficient	TCS <sub>ENS</sub>	%/°C	-0.04	-	0.04	
Output Resistance	R <sub>OUT</sub>	Ω	-	1	5	
Output Bandwidth	BW	kHz	40	-	-	@Small signal -3dB
Response time	t <sub>r</sub>	μS	-	-	8	
Rms voltage isolation test	V <sub>d</sub>	kV	-	-	3	@AC 50Hz 1Min
<b>General data</b>						
Ambient operating temperature	T <sub>A</sub>	°C	-40~+125			
Ambient storage temperature	T <sub>S</sub>	°C	-40~+125			

**Notes:**

(1) The indicated offset voltage is the one after the core hysteresis is removed.



Dimensions BCX7-IOV1HT (in mm. 1 mm = 0.0394 inch)

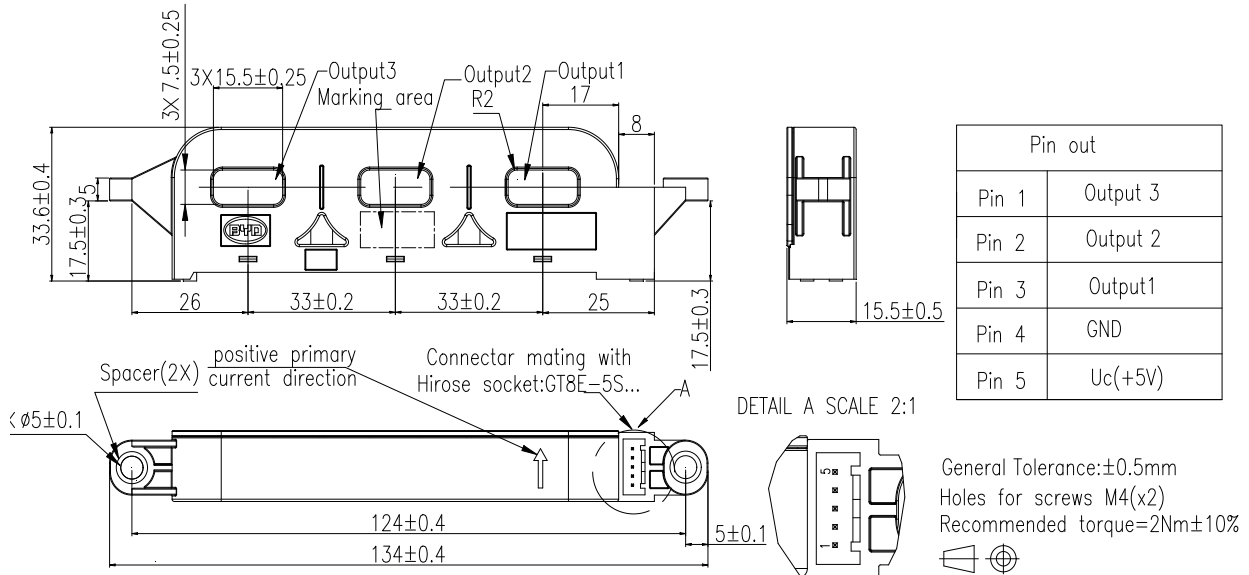

◆ Instructions of use

1. When the test current passes through the sensors, you can get the size of the output voltage. (Warning: wrong connection may lead to sensors damage).
2. Based on user needs, the output range of the sensors can be appropriately regulated.
3. According to user needs, different rated input currents and output voltages of the sensors can be customized.



**RESTRICTIONS ON PRODUCT USE**

- The information contained herein is subject to change without notice.
- BYD Semiconductor Co., Ltd. (short for) exerts the greatest possible effort to ensure high quality and reliability. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing products, to comply with the standards of safety in making a safe design for the entire system, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue. In developing your designs, please ensure that products are used within specified operating ranges as set forth in the most recent products specifications.
- The products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury (“Unintended Usage”). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of products listed in this document shall be made at the customer’s own risk.